# MX Cloud Managed Security Appliance Series



### Overview

Cisco Meraki MX Security Appliances is ideal for organizations with large numbers of distributed sites. Since the MX is 100% cloud managed, installation and remote management is simple. The MX has a comprehensive suite of network services, eliminating the need for multiple appliances. Services include Layer 7 application firewall, content filtering, web search filtering, SNORT<sup>®</sup> based intrusion prevention, web caching, Intelligent WAN with multiple WAN uplinks and 4G failover.

### Feature-rich Unified Threat Management (UTM) Capabilities

- Application-aware traffic control: set bandwidth policies based on Layer 7 application type (e.g., YouTube, Skype, P2P).
- Content filtering: CIPA-compliant content filter, safe-seach enforcement (Google/Bing), and YouTube for Schools.
- Intrusion prevention: PCI-compliant IPS sensor using industry-leading SNORT<sup>®</sup> signature database from Sourcefire.
- Anti-virus and anti-phishing: flow-based protection engine powered by Kaspersky.
- Identity-based security policies and application management.

### **Industry-leading Cloud Management**

- Unified WAN, LAN, and wireless LAN management through a webbased dashboard.
- Template based settings scale easily from small deployments to large, multi-site deployments with tens of thousands of devices.
- Role-based administration, email alerts on configuration change, connectivity issues and power loss, auditable change logs.
- Summary reports with user, device, and application usage details archived in the cloud.

### **Resilient Site-to-Site VPN with 4G Failover**


- Auto VPN: automatic routing table generation, IKE/IPsec setup and key exchange via Cisco Meraki's secure cloud.
- Automatic failover to secondary WAN link or 4G connection.
- Interoperates with standards-based IPsec VPNs.
- Automated MPLS to VPN failover.
- Client VPN: L2TP IPsec support for native Windows, Mac OS X, iPad and Android clients with no per-user licensing fees.

### **Branch Gateway Services**

- Built-in DHCP, NAT, QoS, and VLAN management services.
- Web caching: accelerates frequently accessed content.
- Link bonding: combines multiple WAN links into a single highspeed interface, with policies for QoS, traffic shaping, and failover.
- Layer 3 failover: automatic detection of layer 2 and layer 3 outages and fast failover, including 3G/4G USB modems.

### Inside the Cisco Meraki MX

MX400 shown, features vary by model

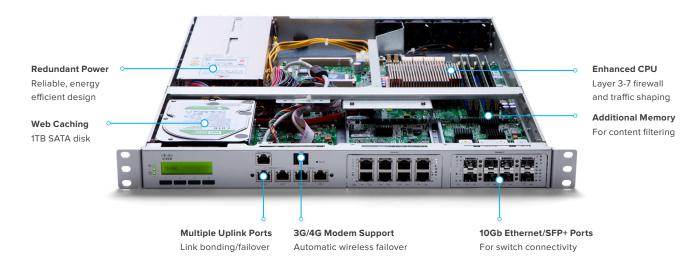

**Cloud Managed Architecture** 

Built on Cisco Meraki's award-winning cloud-managed architecture, the MX is the only 100% cloud-managed Unified Threat Management appliance. MX appliances self-provision, automatically pulling policies and configuration settings from the cloud. Powerful remote tools provide network-wide visibility and control, and enable administration without on-site networking expertise.


Cloud services deliver seamless firmware and security signature updates, automatically establish site-to-site VPN tunnels, and provide 24x7 network monitoring. Moreover, the MX's browserbased management dashboard completely eliminates the need for training.

### Ironclad Security for Edge Networks


The MX hardware platform is purpose-built for Layer 7 deep packet inspection, with advanced security features including IPS, content filtering, web search filtering, anti-virus / anti-phishing, and IPsec VPN connectivity, while providing the throughput and capacity for modern, bandwidth-intensive networks.

Layer 7 fingerprinting technology lets administrators identify unwanted content and applications and prevent recreational apps like BitTorrent from wasting precious bandwidth.

The integrated Sourcefire SNORT® engine delivers superior intrusion prevention coverage, a key requirement for PCI 3.0 compliance. The MX also uses the Webroot® URL categorization database for CIPA / IWF compliant content-filtering, Kaspersky® engine for anti-virus / antiphishing filtering, and MaxMind for geo-IP based security rules



Best of all, these industry-leading Layer 7 security engines and signatures are always kept up-to-date via the cloud, simplifying network security management and providing peace-of-mind to IT administrators.

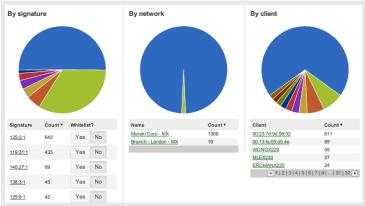

Organization Level Threat Assessment

Cisco Meraki Cloud Management Architecture

VPN St	atus		for the last da	ay –		Map Ring
Latency 300ms - 200ms -		12 Рм ов Рм	DRNIA OLas Ve	rgas ZONA NEW MEXICO	OKLAH	ILLANS OND PEND INDIANA SMISSOUCH KENTURKA KENTURKA MISSISSE KENTURKA KANTURKA KENTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTURKA KANTU
100ms -	Wed 04 DS AM	12 PM 08 PM		took between 50		FLORIDA rgle, INEGI Terms of Use Report a map error
Status	Description	Usage *	Average latency	Subnets	Peers	Connectivity
•	TX-Houston-HQ	248.23 TB	108 ms	5	38	
•	TX-Houston-DC Firewall	41.24 TB	118 ms	5	38	
•	TX-Beaumont-Main	39.82 TB	128 ms	5	34	
•	TX-Deerpark	30.85 TB	72 ms	5	28	
•	TX-Houston-BAM-Yard	26.47 TB	57 ms	5	28	
•	LA-Sulphur	24.44 TB	148 ms	5	31	
•	TN-Kingsport-MarketStreet	21.23 TB	127 ms	5	23	
•	TX-Clute-Miken-Main	20.19 TB	138 ms	5	28	
•	TN-Kingsport-JaredDrive	17.67 TB	111 ms	5	27	
•	TX-Freeport-Yard	17.66 TB	111 ms	5	21	
•	IL-Joliet	17.46 TB	120 ms	5	28	
•	MS-Pascagoula	15.59 TB	126 ms	5	25	
•	MD-WhiteMarsh-Baltimore	11.46 TB	84 ms	5	22	
•	LA-BatonRouge	10.78 TB	96 ms	5	33	
0	LA-BatonRouge-XOM	10.16 TB	136 ms	5	24	
•	FL-Orlando	9.69 TB	113 ms	5	23	
•	TX-Baytown-XOM	7.45 TB	93 ms	5	22	
•	ME-Portland	5.85 TB	80 ms	5	21	

light country approving	nately 2033 unique clients										
1500	lately 2000 unique cilents										_
1000	$\sim$			_			$\nearrow$	~			
500	~						~	~			~~
Jan 29 00:00 Jan 29	12:00 Jan 30 00:00 Jan 30 12:00 Ja	an 31 00:00 J	an 31 12:00 F	eb 01 00;	00 Feb 01 12	:00 Feb 02 00	:00 Feb 02 12	00 Feb 03 00	:00 Feb 03 12:0	0 Feb 04 00:00 F	eb 04
Isage 7.7 TB (↓ 1.77 TI	B, ↑5.93 TB)										
00 Mb/s											
00 Mb/s											
00 Mb/s								Λ			
10 Mb/s	MMM		-		A .	$\frown$	1	~~	A (		
0 Mb/s Jan 29 00:00 Jan 25							/ ~ -	V	<u> </u>	0 Feb 04 00:00 F	
38H 23H 00000 - 38H 23	12:00 Jan 30 00:00 Jan 30 12:00 J	an 31 00:00 J	an 51 12:00 P	80 01 003	UU Feb 01 12	:00 Feb 02 00	UU Feb 02 12	:00 Feb 03 00	:00 Feb 03 12:0	0 Feb 04 00:00 F	100 04 1
	Destination	Country	Protocol	Port	% Usage *		Sent	Received		Active time	60.04
Application									Flows 🕕		100.04
pplication	Destination	Country	Protocol	Port	% Usage *	Usage 💿	Sent	Received	Flows () 7622	Active time	60.04
Application 2DNs 2DNs	Destination	Country US	Protocol TCP	Port 443	% Usage * 34.5%	Usage () 2.66 TB	Sent 2.63 TB	Received 32.89 GB	Flows () 7622 3083	Active time () 48 hours	60.04
pplication IDNs IDNs ISOgle HTTPS	Destination	Country US US	Protocol TCP TCP	Port 443 443	% Usage ▼ 34.5% 32.9%	Usage () 2.66 TB 2.54 TB	Sent 2.63 TB 2.51 TB	Received 32.89 GB 31.27 GB	Flows () 7622 3083 1392026	Active time (2) 48 hours 41 hours	80.04
pplication IDNs IDNs Isogle HTTPS Viscellaneous secure web	Destination	Country US US	Protocol TCP TCP	Port 443 443	% Usage ▼ 34.5% 32.9% 1.9%	Usage () 2.66 TB 2.54 TB 148.49 GB	Sent 2.63 TB 2.51 TB 47.38 GB	Received 32.89 GB 31.27 GB 101.11 GB	Flows 7622 3083 1392026 649457	Active time (3) 48 hours 41 hours 14 months	80.04
pplication <u>DNs</u> <u>iDNs</u> <u>icogie HTTPS</u> <u>fiscellaneous secure web</u> <u>iDNs</u>	Destination	Country US US - US	Protocol TCP TCP - TCP	Port 443 443 - 443	% Usage ▼ 34.5% 32.9% 1.9% 1.8%	Usage () 2.66 TB 2.54 TB 148.49 GB 140.62 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB	Received 32.89 GB 31.27 GB 101.11 GB 134.54 GB	Flows 7622 3083 1392026 649457 1500	Active time (2) 48 hours 41 hours 14 months 35 days	80.04
pplication <u>DNs</u> icogle HTTPS liscellaneous secure web <u>DNs</u> liscellaneous video	Destination	Country US US US US US	Protocol TCP TCP - TCP TCP	Port 443 443 - 443 443	% Usage * 34.5% 32.9% 1.9% 1.8% 1.1%	Usage () 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB	Received 32.89 GB 31.27 GB 101.11 GB 134.54 GB 1.94 GB	Flows 7622 3083 1392026 649457 1500 618	Active time (1) 48 hours 41 hours 14 months 35 days 8 hours	80.04
pplication IDNs ICONS ICONS ICONS ISOCEILANCES SECURE WEB IDNS ISOCEILANCES VIDEO Veb based email	Destination place gaps in determined and any other is the second second any other is the second s	Country US US US US US US	Protocol TCP TCP TCP TCP TCP TCP	Port 443 443 - 443 443 80	% Usage * 34.5% 32.9% 1.9% 1.8% 1.1% 1.1%	Usage () 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB 89.00 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB 1.46 GB	Received 32.89 GB 31.27 GB 101.11 GB 134.54 GB 1.94 GB 87.54 GB	Flows 7622 3083 1392026 649457 1500 618 734309	Active time (2) 48 hours 41 hours 14 months 35 days 8 hours 4.6 days	80.04
pplication DNs DNs Social HTPS liscellaneous secure web DNs liscellaneous video (vide based email lon-web TCP	Destination gloss gave for objectig and suggesterigeshield of backmarge net - registered, legate (a restin area renges) in patholic set of generative of restin area renges) in patholic set of	Country US US US US US US US US	Protocol TCP TCP TCP TCP TCP TCP TCP	Port 443 443 - 443 443 80 443	% Usage * 34.5% 32.9% 1.9% 1.8% 1.1% 1.1% 1.1%	Usage 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB 89.00 GB 78.95 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB 1.46 GB 40.39 GB	Received           32.89 GB           31.27 GB           101.11 GB           134.54 GB           1.94 GB           87.54 GB           38.56 GB	Flows () 7622 3083 1392026 649457 1500 618 734309 1786	Active time (2) 48 hours 41 hours 14 months 35 days 8 hours 4.6 days 4.3 months	80.04
pplication DNs DNs loogle HTTPS fiscellaneous secure web DNs fiscellaneous video feb based email loogle Video	Destination - - - - - - - - - - - - - - - - - - -	Country US US US US US US US	Protocol TCP TCP TCP TCP TCP TCP TCP TCP	Port 443 443 - 443 443 80 443 49948	% Usage * 34.5% 32.9% 1.9% 1.8% 1.1% 1.1% 1.1% 1.0%	Usage 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB 89.00 GB 78.95 GB 76.23 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB 1.46 GB 40.39 GB 38.02 GB	Received           32.89 GB           31.27 GB           101.11 GB           134.54 GB           1.94 GB           87.54 GB           38.56 GB           38.21 GB	Flows () 7622 3083 1392028 649457 1500 618 734309 1786 34675	Active time (2) 48 hours 41 hours 14 months 35 days 8 hours 4.6 days 4.3 months 46 hours	80.04
pplication DNs DDs icoogle HTPS fiscellaneous secure web DNs fiscellaneous video (veb based email ion-web TCP icoogle Video icoogle Video	Destination plan gave 1 - object and comparing setting and comparing setting a setting plane setting setting and plane setting setting setting plane setting	Country US US US US US US US	Protocol TCP TCP TCP TCP TCP TCP TCP TCP	Port 443 443 - 443 443 80 443 49948 -	% Usage * 34.5% 32.9% 1.9% 1.8% 1.1% 1.1% 1.0% 1.0% 0.9%	Usage 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB 89.00 GB 78.95 GB 76.23 GB 72.73 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB 1.46 GB 40.39 GB 38.02 GB 1.19 GB	Received           32.89 GB           31.27 GB           101.11 GB           134.54 GB           1.94 GB           87.54 GB           38.56 GB           38.21 GB           71.54 GB	Flows () 7622 3083 1392026 649457 1500 618 734309 1786 34675 4975343	Active time (2) 48 hours 41 hours 14 months 35 days 8 hours 4.6 days 4.3 months 46 hours 8 days	80.04
Application 2DNs 2DNs 300gie HTTPS fiscellaneous video Veb based email on-web TCP 300gie 300gie 10P	Destination	Country US US US US US US - - -	Protocol TCP TCP TCP TCP TCP TCP TCP TCP TCP	Port 443 443 443 443 443 443 49948 - -	% Usage * 34.5% 32.9% 1.9% 1.8% 1.1% 1.1% 1.0% 1.0% 0.9% 0.8%	Usage 2.66 TB 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB 89.00 GB 78.95 GB 78.95 GB 78.95 GB 78.23 GB 72.73 GB 64.42 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB 1.46 GB 40.39 GB 38.02 GB 1.19 GB 21.42 GB	Received 32.89 GB 31.27 GB 101.11 GB 134.54 GB 1.94 GB 87.54 GB 38.56 GB 38.21 GB 71.54 GB 43.00 GB	Flows 7622 3083 1392026 649457 1500 618 734309 1786 34675 4975343 104	Active time ① 48 hours 41 hours 14 months 35 days 8 hours 4.6 days 4.6 hours 8 days 20 months	80.04
Application 2DNs 2DNs 2DNs 2DNs 2DNs 2DNs 2DNs Macelianeous secure web Macelianeous video Meb based email Non-web TCP 3coole Video 3coole Udeo 3coole Udeo 4coole and the secure web Macelianeous secure web	Destination - 10.92,110,138 - 102,119,58,3.195	Country US US US US US US - - - US	Protocol TCP TCP TCP TCP TCP TCP TCP TCP - - - UDP	Port 443 443 - 443 443 80 443 49948 - - 48919	% Usage ▼ 34.5% 32.9% 1.9% 1.8% 1.1% 1.1% 1.0% 0.9% 0.8% 0.8%	Usage 2.66 TB 2.54 TB 148.49 GB 140.62 GB 90.41 GB 89.00 GB 78.95 GB 78.95 GB 78.95 GB 78.23 GB 72.73 GB 64.42 GB 61.72 GB	Sent 2.63 TB 2.51 TB 47.38 GB 6.08 GB 88.46 GB 1.46 GB 40.39 GB 38.02 GB 1.19 GB 21.42 GB 13.08 GB	Received 32.89 GB 31.27 GB 101.11 GB 134.54 GB 1.94 GB 87.54 GB 38.56 GB 38.21 GB 71.54 GB 43.00 GB 48.63 GB	Flows 0 7622 3083 1392026 649457 1500 618 734309 1786 34675 4975343 104 1135528	Active time (2) 48 hours 41 hours 14 months 35 days 8 hours 4.6 days 4.6 days 4.3 months 46 hours 8 days 20 months 5 months	

Next Gen Application Firewall and Traffic Visibility

Search: ipad Co Clear Advanced search » Help							
8 matches in 299 Columns   Download as XML							
		Description	IP address	MAC address	Usage	Access	Manufacturer *
	1	Bobby-Longs-iPad	172.16.30.51	a4:d1:d2:10:f0:9d	11.3 MB	normal	Apple
	2	Brian-Tobins-iPad	172.16.30.142	7c:6d:62:d7:91:58	853 KB	normal	Apple
	3	iPad	172.16.30.49	70:de:e2:40:f3:02	145.8 MB	normal	Apple
	4	Meraki-Marketing-iPad	172.16.30.67	b8:ff:61:b8:78:8d	331.3 MB	normal	Apple
	5	PCC-iPad-1	172.16.30.183	7c:6d:62:db:32:f5	8.5 MB	normal	Apple
	6	Wilson-John-Chans-iPad-2	172.16.30.135	a4:67:06:99:da:a8	33.5 MB	normal	Apple

User and Device Fingerprints

Internet 1	100 Mbps
Internet 2	20 Mbps details
Primary uplink	Internet 1

Link Bonding and Failover

Identity Based Policy Management

Auto Configuring Site-to-Site VPN

Students

Firewall and traffic shaping () Custom network firewall & shaping rules +

Allow Any

# Policy Application

2 Deny Online backup

Add a layer 7 firewall rule

Add a firewall rule

Use custom bandwidth limit + unlimited

Any Any

details

Anv

Default rule

Actions

# Policy Protocol Source Src port Destination Dst port Comment Actions

Any

All Online backup 

Group policies > Students

Name

Bandwidth

Layer 3 firewall

Layer 7 firewall

### Intelligent WAN Made Simple

#### **Transport independence:**

Dual WAN ports with load balancing and failover enable the use of MPLS and redundant, commodity Internet connections, providing additional bandwidth and higher reliability.

#### 3G / 4G failover:

The Cisco Meraki MX supports 3G/4G service providers globally for WAN connection failover. Web caching temporarily stores video, media, and web documents, lowering bandwidth usage and accelerating the download speed of Internet content.

### **Application optimization:**

Layer 7 traffic shaping, application prioritization optimize the traffic for mission-critical applications and user experience.

#### Intelligent path control\*:

Use Performance-based-Routing to choose the best uplink based on latency or packet loss. Define policies for sending the right traffic through the appropriate path (e.g., send voice via MPLS, http via VPN over broadband).

#### Secure connectivity:

Cisco Meraki's unique auto provisioning site-to-site VPN (Auto VPN) connects branches securely with complete simplicity. Using AES 128-bit encryption, the MX Security Appliances automatically configure VPN parameters needed to establish and maintain VPN sessions. A unique cloud-enabled discovery mechanism enables automatic interconnection of VPN peers and routes across the WAN, and keeps them updated in dynamic IP environments.

\*Available calendar Q2 2015

## MX64W with 802.11ac Wireless

The MX64W integrates Cisco Meraki's award-winning wireless technology with the powerful MX network security features in a compact form factor ideal for branch offices or small enterprises:

- Dual-band 802.11n/ac, 2x2 MIMO with 2 spatial streams
- Unified management of network security and wireless
- Integrated enterprise security and guest access



MX64W Security Appliance

### Z1 Telecommuter Gateway



Z1 Telecommuter Gateway

The Z1 Telecommuter Gateway extends the power of the Cisco Meraki dashboard and cloud-based centralized management to employees, IT staff and executives working from home.

Using the patent-pending Cisco Meraki Auto VPN, Administrators can extend network services including VoIP and remote desktop (RDP) to remote employees with a single-click, provide wired and wireless access, and increase end-user productivity through Layer 7 traffic shaping and prioritization.

- 1 x 802.11b/g/n radio, 1 x 802.11a/n radio, 2x2 MIMO with 2 spatial streams
- Site-to-site (IPsec) VPN using Cisco Meraki Auto VPN
- · Layer 7 application visibility and traffic shaping

### Accessories

The Cisco Meraki MX100, MX400, and MX600 models support pluggable optics for high-speed backbone or link aggregation connections between wiring closets or to aggregation switches. Cisco Meraki offers several standards-based Gigabit and 10 Gigabit pluggable modules. Each appliance has also been tested for compatibility with several third-party modules.



Interface Modules for MX400 and MX600

Pluggable (SFP) Optics for MX100, MX400, MX600

### Accessories / Optics

Supported Cisco Meraki accessory modules for MX100, MX400 and MX600.

MODEL	10DEL DESCRIPTION		
IM-8-CU-1GB Cisco Meraki 8 x 1 GbE Copper Interface Module for MX400 and MX600			
IM-8-SFP-1GB Cisco Meraki 8 x 1 GbE SFP Interface Module for MX400 and MX600			
IM-2-SFP-10GB Cisco Meraki 2 x 10 GbE SFP+ Interface Module for MX400 and MX600			
MA-SFP-1GB-SX Cisco Meraki 1 GbE SFP SX Fiber Module (1000BASE-SX, range: 550m)			
MA-SFP-10GB-SR	Cisco Meraki 10 GbE Short Range SFP+ Module (10GBASE-SR, range: 400m)		
MA-CBL-TA-1M	Cisco Meraki 10 GbE Twinax Cable with SFP+ Connectors (10GSFP+Cu, range: 1m)		

Note: Please refer to meraki.com for additional single-mode and multi-mode fiber transceiver modules

### Lifetime Warranty with Next-day Advanced Replacement

Cisco Meraki MX appliances include a limited lifetime hardware warranty that provides next-day advance hardware replacement. Cisco Meraki's simplified software and support licensing model also combines all software upgrades, centralized systems management, and phone support under a single, easy-to-understand model. For complete details, please visit meraki.cisco.com/support.

## **Product Options**

	MX64	MX64W	MX80	MX100	MX400	MX600
			·	·	····· •··• •··••	
Recommended use cases	Small retail branch, small clinic	Small retail branch, small clinic	Medium sized branch	Large branch	K-12 firewall / VPN concentrator	Large K-12 firewall, VPN concentrator
Recommended max users	50	50	100	500	2,000	10,000
Stateful Firewall Throughput	200 Mbps	200 Mbps	250 Mbps	750 Mbps	1 Gbps	1 Gbps
Advanced Security Throughput	80 Mbps	80 Mbps	80 Mbps	600 Mbps	1 Gbps	1 Gbps
Maximum VPN sessions	25	25	50	250	1,000	5,000
Interfaces	5 x GbE	5 x GbE	5 x GbE	9 x GbE 2 x GbE (SFP)	4 x GbE	4 x GbE
Additional Interface Modules	N/A	N/A	N/A	N/A	8 x GbE (RJ45) 8 x GbE (SFP) 4 x 10GbE (SFP+) (2 modules max)	8 x GbE (RJ45) 8 x GbE (SFP) 4 x 10GbE (SFP+) (2 modules max)
Web Caching	N/A	N/A	Yes	Yes	Yes	Yes
Hard Drive*	N/A	N/A	1 TB	1 TB	1 TB	4 × 1 TB (RAID)
USB for 3G/4G Failover	Yes	Yes	Yes	Yes	Yes	Yes
Mounting	Desk / Wall	Desk / Wall	1U rack	1U rack	1U rack	2U rack
Dimensions	9.5" × 5.2" × 1" (239mm × 132mm × 25mm)	9.5" x 5.2" x 1" (239mm x 132mm x 25mm)	19.0" x 10.0 " x 1.75" (483 mm x 254 mm x 44 mm)	19.0" x 10.0 " x 1.75" (483 mm x 254 mm x 44 mm)	19.0" x 22.0 " x 1.75" (483 mm x 559 mm x 44 mm)	19.0" x 22.0 " x 3.5" (483 mm x 559 mm x 89 mm)
Weight	3.04 lb (1.4 kg)	3.04 lb (1.4 kg)	8 lb (3.6kg)	9 lb (4.1kg)	33 lb (15.0 kg)	53 lb (24.0 kg)
Power Supply	18W DC (included)	18W DC (included)	100-220V 50/60Hz AC	100-220V 50/60Hz AC	100-220V 50/60Hz AC (dual)	100-220V 50/60Hz AC (dual)
Power Load (idle/max)	4W / 10W	6W / 13W	26W/32W	30W / 55W	123W / 215W	132W / 226W
Operating Temperature	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)	32°F to 104°F (0°C to 40°C)
Humidity	5% to 95%	5% to 95%	5% to 95%	5% to 95%	5% to 95%	5% to 95%

\*Note: Hard drive is used for web caching.

### **Specifications**

#### Management

Managed via the web using the Cisco Meraki dashboard

Single pane-of-glass into managing wired and wireless networks

Zero-touch remote deployment (no staging needed)

Automatic firmware upgrades and security patches

Templates based multi-network management

Org-level two-factor authentication and single sign-on

Role based administration with change logging and alerts

Advanced Security Services	
----------------------------	--

Content filtering (Webroot BrightCloud CIPA compliant URL database)

Web search filtering (including Google / Bing SafeSearch)

YouTube for Schools

Intrusion-prevention sensor (Sourcefire SNORT® based)

Anti-virus engine and anti-phishing filtering (Kaspersky SafeStream II engine)

Geography based firewall rules (MaxMind Geo-IP database)

Note: Advanced security services require Advanced Security license.

#### Integrated Wireless (MX64W)

1 x 802.11a/n/ac (5 GHz) radio

1 x 802.11b/g/n (2.4 GHz) radio

Max data rate 1.2 Gbit/s (aggregate)

2 x 2 MIMO with two spatial streams

2 external dual-band dipole antennas (connector type: RP-SMA)

Antenna gain: 3.0 dBi @ 2.4 GHz, 3.5 dBi @ 5 GHz

WEP, WPA, WPA2-PSK, WPA2-Enterprise with 802.1X authentication

Regulatory: FCC (US), IC (Canada), CE (Europe), C-Tick (Australia/New Zealand), RoHS

Note: Integrated wireless is only available on the MX64W model.

#### Regulatory

FCC (US)

CB (IEC)

CISPR (Australia/New Zealand)

#### Warranty

Full lifetime hardware warranty with next-day advanced replacement included.

### Monitoring and Reporting

Throughput, connectivity monitoring and email alerts Detailed historical per-port and per-client usage statistics

\_\_\_\_\_

Application usage statistics

Org-level change logs for compliance and change management

VPN tunnel and latency monitoring

Network asset discovery and user identification

Periodic emails with key utilization metrics

Syslog integration

#### **Remote Diagnostics**

Live remote packet capture
Real-time diagnostic and troubleshooting tools
Aggregated event logs with instant search

#### **Network and Security Services**

Stateful firewall, 1:1 NAT, DMZ

Identity-based policies

Auto VPN: Automated site-to-site (IPsec) VPN, for hub-and-spoke or mesh topologies

Client (IPsec L2TP) VPN

Multiple WAN IP, PPPoE, NAT

VLAN support and DHCP services

Static routing

User and device quarantine

WAN Performance Management
Web caching
WAN link aggregation
Automatic Layer 3 failover (including VPN connections)
3G / 4G USB modem failover
Application level (Layer 7) traffic analysis and shaping
Ability to choose WAN uplink based on traffic type
Note: Web caching is not available on the MX64 or MX64W models

Note: Web caching is not available on the MX64 or MX64W models

### Ordering Guide

To place an order for an MX appliance, pair a specific hardware model with a single license (which includes cloud services, software upgrades and support). For example, to order an MX64 with 3 years of Advanced Security license, order an MX64-HW with LIC-MX64-SEC-3YR. Lifetime warranty with advanced replacement is included on all hardware at no additional cost.

MODEL	LICENSE	DESCRIPTION
MX64-HW	LIC-MX64-ENT-1YR LIC-MX64-ENT-3YR LIC-MX64-ENT-5YR LIC-MX64-SEC-1YR LIC-MX64-SEC-3YR LIC-MX64-SEC-5YR	Cisco Meraki MX64, 1 year Enterprise License and Support Cisco Meraki MX64, 3 year Enterprise License and Support Cisco Meraki MX64, 5 year Enterprise License and Support Cisco Meraki MX64, 1 year Advanced Security License and Support Cisco Meraki MX64, 3 year Advanced Security License and Support Cisco Meraki MX64, 5 year Advanced Security License and Support
MX64W-HW	LIC-MX64W-ENT-1YR LIC-MX64W-ENT-3YR LIC-MX64W-ENT-5YR LIC-MX64W-SEC-1YR LIC-MX64W-SEC-3YR LIC-MX64W-SEC-5YR	Cisco Meraki MX64W, 1 year Enterprise License and Support Cisco Meraki MX64W, 3 year Enterprise License and Support Cisco Meraki MX64W, 5 year Enterprise License and Support Cisco Meraki MX64W, 1 year Advanced Security License and Support Cisco Meraki MX64W, 3 year Advanced Security License and Support Cisco Meraki MX64W, 5 year Advanced Security License and Support
MX80-HW	LIC-MX80-ENT-1YR LIC-MX80-ENT-3YR LIC-MX80-ENT-5YR LIC-MX80-SEC-1YR LIC-MX80-SEC-3YR LIC-MX80-SEC-5YR	Cisco Meraki MX80, 1 year Enterprise License and Support Cisco Meraki MX80, 3 year Enterprise License and Support Cisco Meraki MX80, 5 year Enterprise License and Support Cisco Meraki MX80, 1 year Advanced Security License and Support Cisco Meraki MX80, 3 year Advanced Security License and Support Cisco Meraki MX80, 5 year Advanced Security License and Support
MX100-HW	LIC-MX100-ENT-1YR LIC-MX100-ENT-3YR LIC-MX100-ENT-5YR LIC-MX100-SEC-1YR LIC-MX100-SEC-3YR LIC-MX100-SEC-5YR	Cisco Meraki MX100, 1 year Enterprise License and Support Cisco Meraki MX100, 3 year Enterprise License and Support Cisco Meraki MX100, 5 year Enterprise License and Support Cisco Meraki MX100, 1 year Advanced Security License and Support Cisco Meraki MX100, 3 year Advanced Security License and Support Cisco Meraki MX100, 5 year Advanced Security License and Support
MX400-HW	LIC-MX400-ENT-1YR LIC-MX400-ENT-3YR LIC-MX400-ENT-5YR LIC-MX400-SEC-1YR LIC-MX400-SEC-3YR LIC-MX400-SEC-5YR	Cisco Meraki MX400, 1 year Enterprise License and Support Cisco Meraki MX400, 3 year Enterprise License and Support Cisco Meraki MX400, 5 year Enterprise License and Support Cisco Meraki MX400, 1 year Advanced Security License and Support Cisco Meraki MX400, 3 year Advanced Security License and Support Cisco Meraki MX400, 5 year Advanced Security License and Support
MX600-HW	LIC-MX600-ENT-1YR LIC-MX600-ENT-3YR LIC-MX600-ENT-5YR LIC-MX600-SEC-1YR LIC-MX600-SEC-3YR LIC-MX600-SEC-5YR	Cisco Meraki MX600, 1 year Enterprise License and Support Cisco Meraki MX600, 3 year Enterprise License and Support Cisco Meraki MX600, 5 year Enterprise License and Support Cisco Meraki MX600, 1 year Advanced Security License and Support Cisco Meraki MX600, 3 year Advanced Security License and Support Cisco Meraki MX600, 5 year Advanced Security License and Support

\*Note: For each MX product, additional 7 or 10 year Enterprise or Advanced Security licensing options are also available (ex: LIC-MX100-SEC-7YR).